

AD A094697

52
LEVEL II

(12)

LOW RATE TRANSMISSION OF VIDEO SIGNALS
USING ADAPTIVE DELTA MODULATION

Sponsored by the
DEFENSE ADVANCED RESEARCH PROJECTS AGENCY

ARPA Order No. 3534


Contract No. MDA 903-80-C-0476

Monitored by Dr. Vinton Cerf

TECHNICAL REPORT ARPA - TR - 2

Date of Contract 1 July 80
Expiration Date 30 Sept. 81

Period Covered
by this Report 10/1/80 - 12/31/80

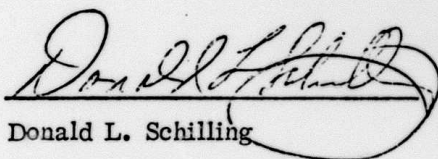

Donald L. Schilling

(212) 862-3737

Principal Investigator

DTIC
ELECTE
FEB 9 1981
C

COMMUNICATIONS SYSTEM LABORATORY
DEPARTMENT OF ELECTRICAL ENGINEERING

DISTRIBUTION STATEMENT A
Approved for public release;
Distribution Unlimited

DDC FILE COPY

81 2 06 059

9 Interim rept.
1 Oct-31 Dec 80

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

19 REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM	
1. REPORT NUMBER 18 DARPA TR-2	2. GOVT ACCESSION NO. AD-A094697	3. RECIPIENT'S CATALOG NUMBER	
4. TITLE (and Subtitle) 6 LOW RATE TRANSMISSION OF VIDEO SIGNALS USING ADAPTIVE DELTA MODULATION		5. TYPE OF REPORT & PERIOD COVERED Interim 10/1/80 - 12/31/81	
7. AUTHOR(s) 10 J. Barba, M. Dressler and D. L. Schilling		6. PERFORMING ORG. REPORT NUMBER	
9. PERFORMING ORGANIZATION NAME AND ADDRESS Research Foundation of CUNY on behalf of The City College New York, N. Y. 10031		15 CONTRACT OR GRANT NUMBER(s) MDA 903-80-C-0476 WARPA Order-3534	
11. CONTROLLING OFFICE NAME AND ADDRESS ARPA (Code HX 1243) 1400 Wilson Blvd. Arlington, Va. 22209 12 5		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 11 30 Dec 80	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) ONR 715 Seventh Avenue New York, N. Y. 10003		12. REPORT DATE 12/30/80	
16. DISTRIBUTION STATEMENT (of this Report) Unlimited		13. NUMBER OF PAGES 2	
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		15. SECURITY CLASS. (of this report) Unclassified	
18. SUPPLEMENTARY NOTES The views and conclusions contained in this document are those of the author and should not be interpreted as necessarily representing the official policies, either express or implied, of the Defense Advanced Research Projects Agency or the United States Government.			
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) (1) DIGITAL VIDEO ENCODING (2) ADAPTIVE DELTA MODULATION (3) TELECONFERENCING			
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) This report describes the mode of operation of the slow scan digital video encoder. 9			

389177 PW

Summary

The objective of this project is to design and construct a slow scan digital video system, using adaptive delta modulation. This system should be capable of transmitting a single frame of video from the encoder, and receiving the video frame at the receiver.

The technique employed is to digitize a frame of "real-time" video using an adaptive delta modulator operating at 16 Mb/s. Thus, for each line in the video frame we generated 928 bits, which are then stored in a digital memory. Since there are approximately 500 lines/frame, the digital memory stores approximately 464K bits. The 464 K bits are then modulated by a modem and transmitted. In the receiver a modem decoder recovers the data which is then stored in a second digital memory. The bits are read out of memory at the regular video rate, decoded by an ADM decoder, and then displayed on a monitor.

The significance of this system when completed will be that:

- 1) the quality of the received video picture is quite good, being that of a 16 Mb/s ADM;
- 2) the cost, complexity, and size of the system is quite small and much of the system can be integrated using standard LSI chips;
- 3) the picture quality does not degrade as a function of the storage time of a frame since a digital memory is used;
- 4) portions of the frame can be retransmitted without retransmitting the entire frame;
- 5) the picture quality is relatively immune to channel errors; error rates of up to 10^{-3} being permissible without significant video degradation;
- 6) the time to transmit a frame of 16 Mb/s ADM encoded video is approximately one-fourth the time needed to transmit PCM encoded video.

Accession For	
FTIS CR&I	<input checked="" type="checkbox"/>
FTIC T.B	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution/	
Availability Codes	
Avail and/or	
Dist Special	
	A

Introduction

In Technical Report TR-1, the design of the digital memory was discussed. Two such memories have now been constructed, tested, and are working properly. In this technical report we describe the various modes of operation.

Modes of Operation

- 1) Single-memory R/W: In this mode a frame of video is encoded and stored in the digital memory. The memory is then read at the 16 Mb/s rate by the ADM decoder and displayed on the video monitor. Note that the memory is constantly being read, since the monitor requires a continual real-time input signal.
- 2) Computer-mode: In this mode a frame of video is encoded and stored in the digital memory. The memory is then outputted and read into disk storage in a PDP 11/34. The computer provides a 15 bit address through its 16 bit output port. Data is read into the computer through the computer's 16 bit input port. Data is read out of the computer over the 16th address line in serial form. The system operation in this mode is currently being improved. With the data stored in the computer it can be processed to remove redundancy. This mode can also be used to packetize the data for transmission over the ARPANET.
- 3) In this mode the digital memory is read into a modem for transmission over the telephone lines. Initial tests have indicated that 4800b/s transmission is possible over the local network in New York City. At this rate a complete frame of video is transmitted every 100s (approximately). Transmission over long distance lines without equalization has resulted in excessively high error rates.

Conclusions

A slow-scan video system has been built and is now operational. The modes of operation has been presented. The removal of redundancy from the video signal will be attempted so as to decrease the time required to transmit a frame of signal.